


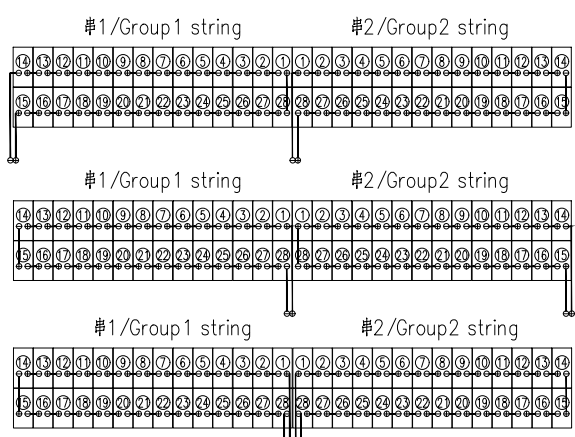

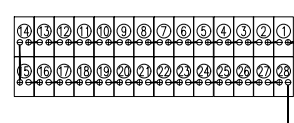


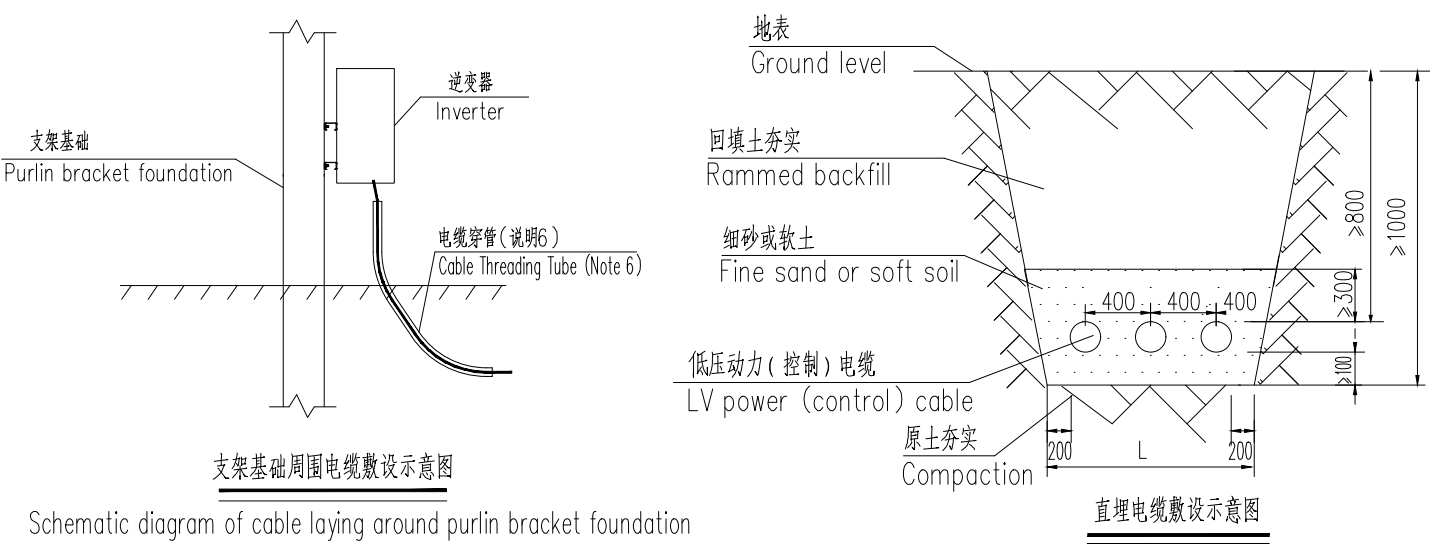

A阵列三种接线方案示意图
Schematic diagram of three wiring schemes for A array
(含有2个组串, 56块电池组件)
(Contains 2 string, 56 modules)

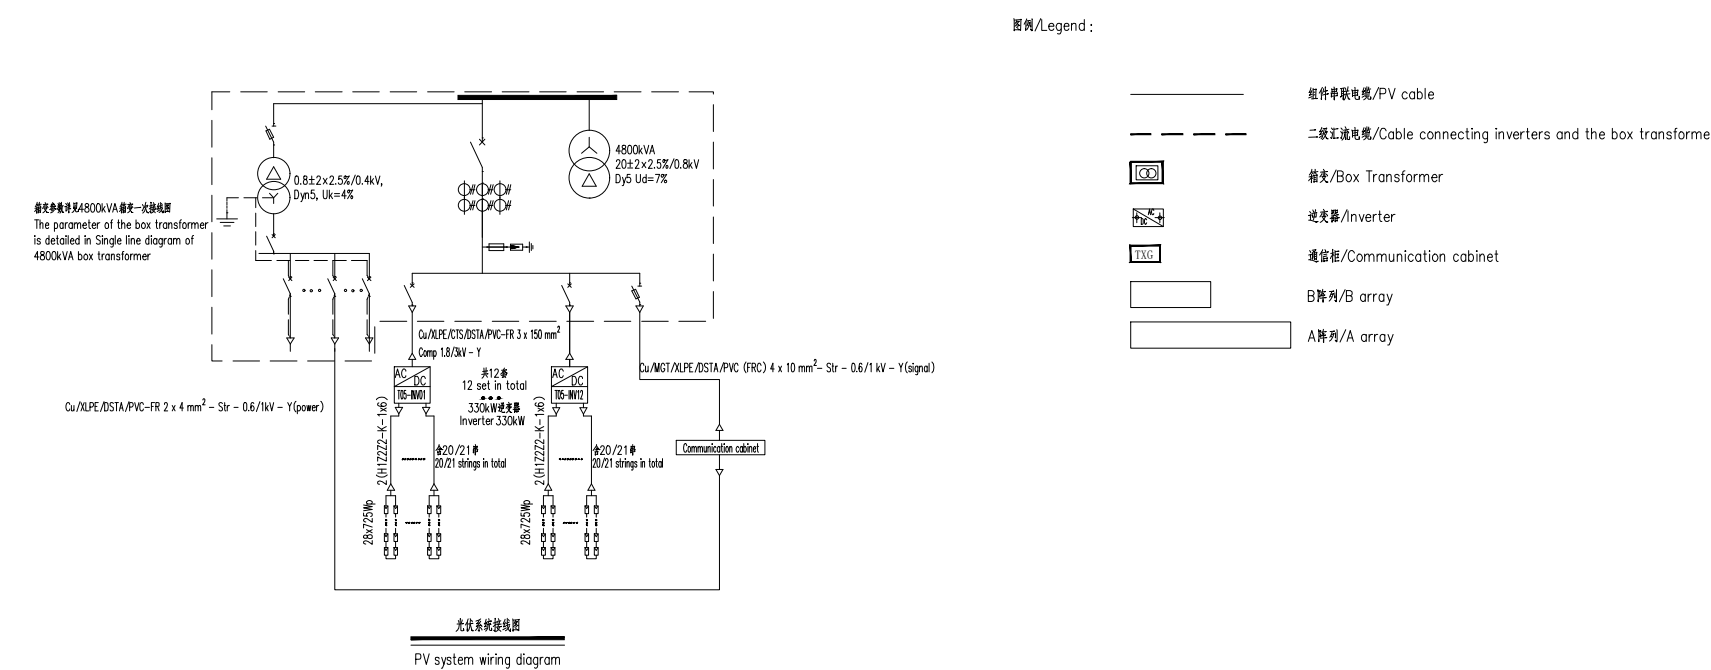

Schematic diagram of three wiring schemes for B array
(Contains 1 string, 28 modules)

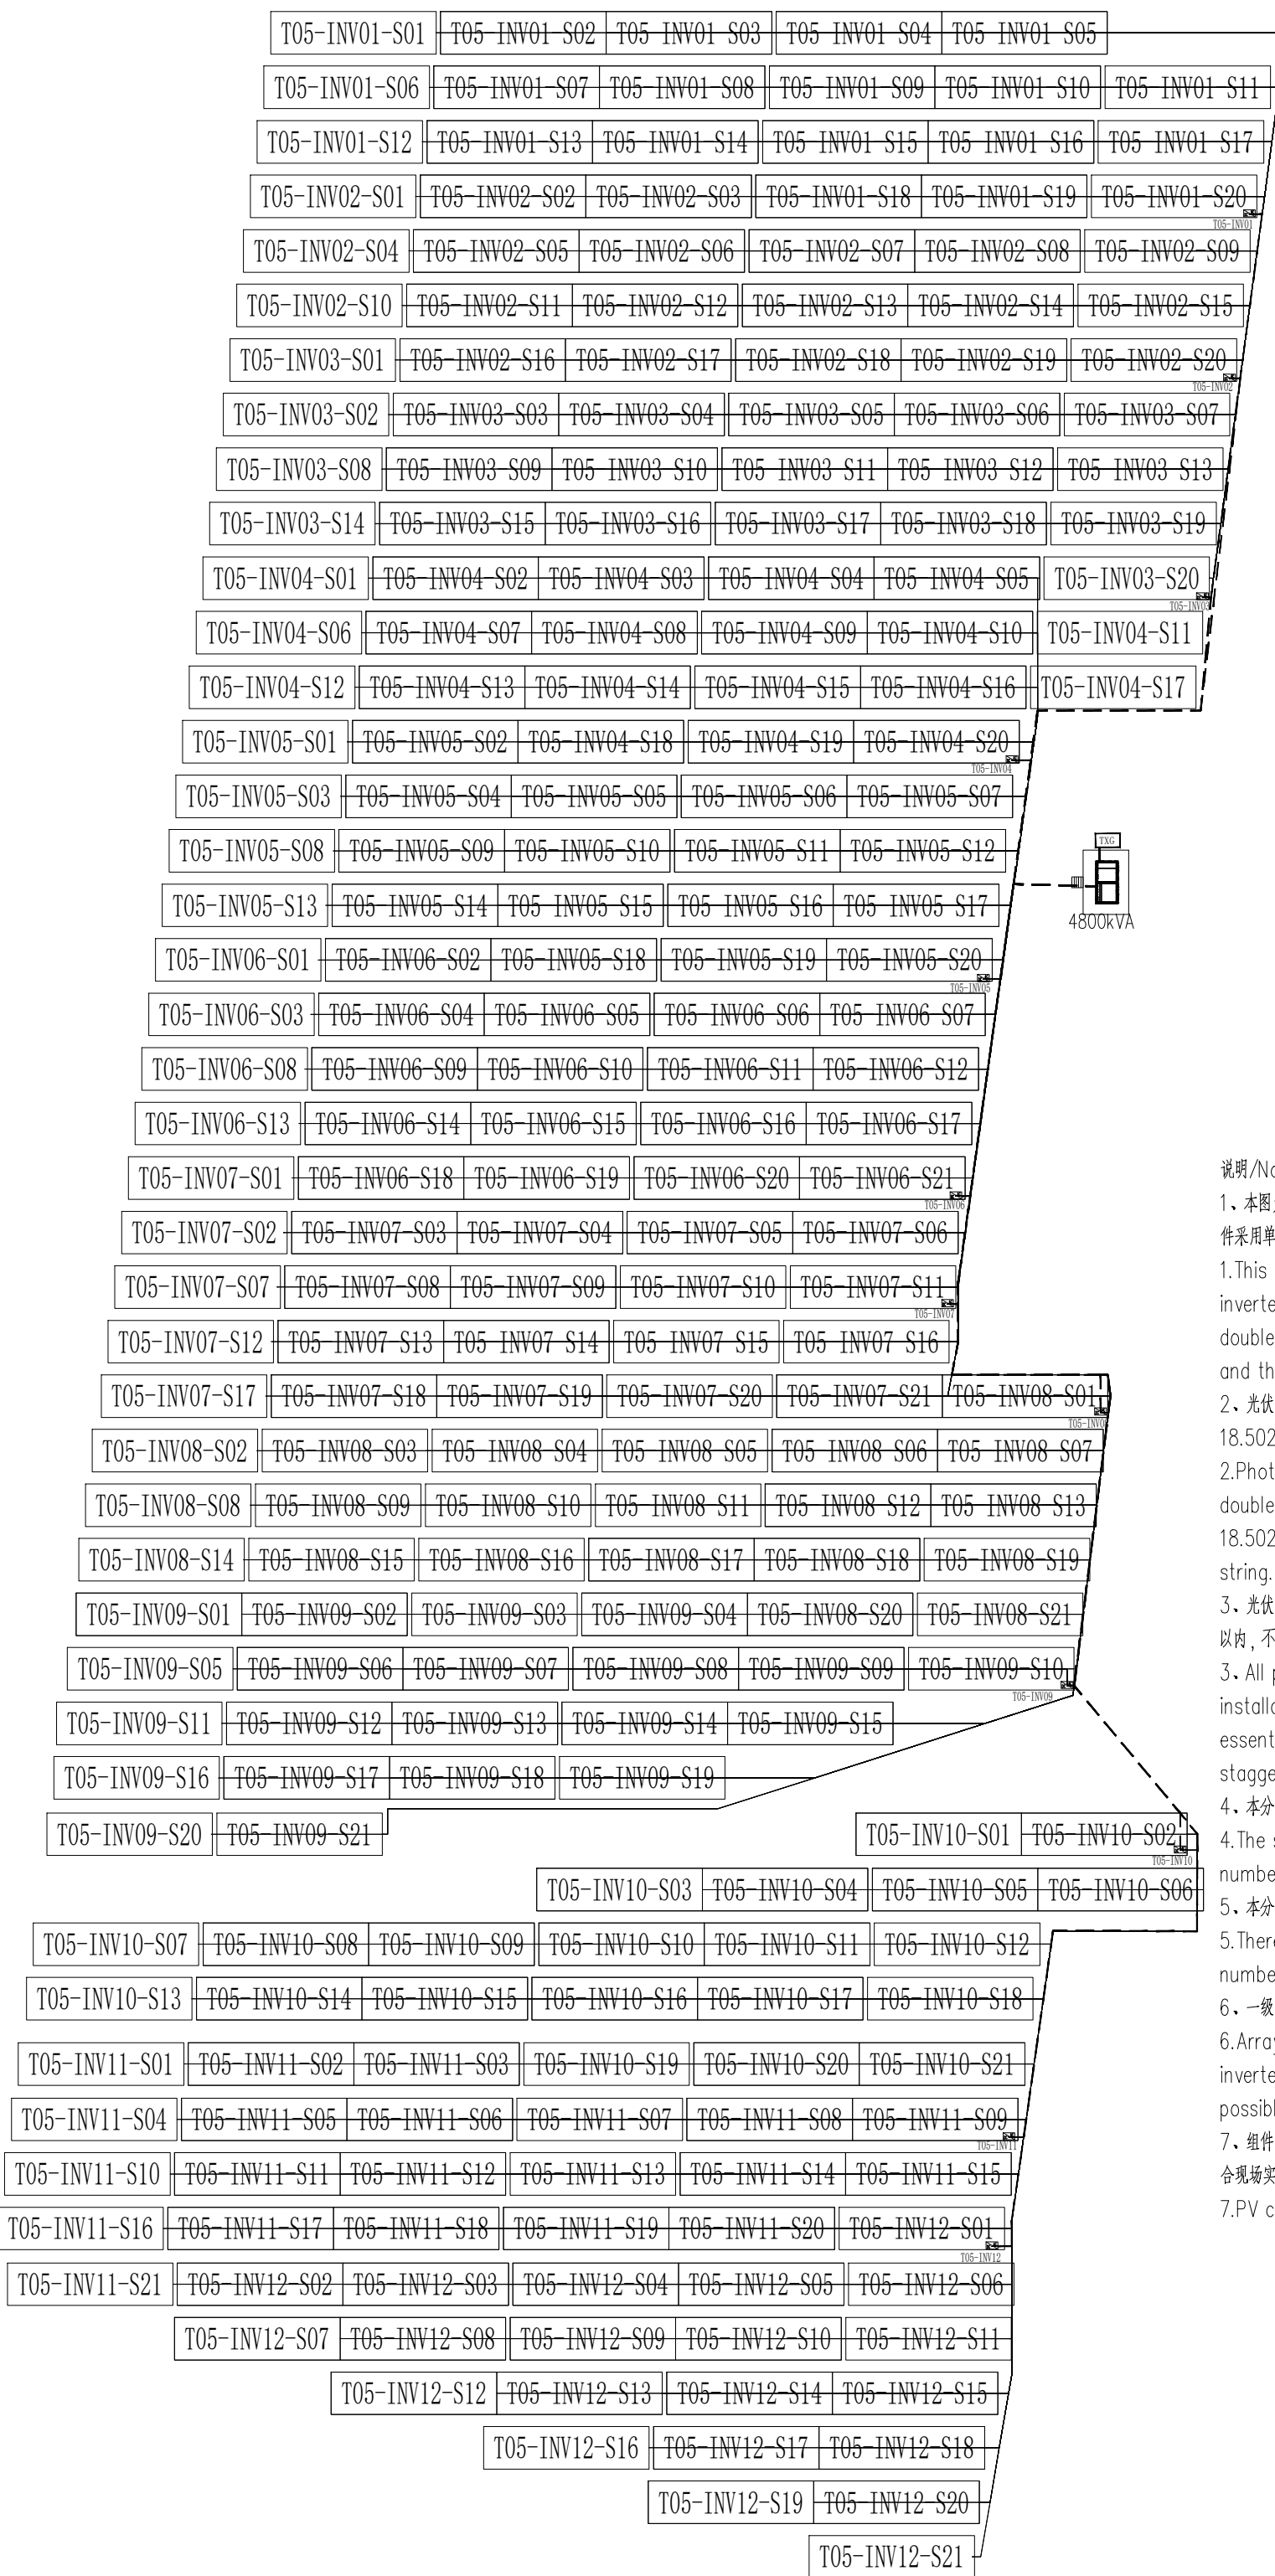

Directly buried cable laying diagram

说明/Notes:

1. 本方案为光伏阵列725W功率单元电压及电流接线图, 本分阵含12个Z子分阵, 本分阵共计包含247个光伏组件, 691块电池组件, 组件串接方式为25串并联再汇流成两根总线, 尺寸3234*1303*33mm, 重量为37.5kg, 由佛山绿源发电设备有限公司提供
1. This is the PV system wiring diagram of the zone T05. Zone T04 contains 12 string inverters, 247 PV strings and 691 PV modules. The module uses a monocrystalline silicon 725W double-sided double-glass cell module with an aluminum frame. The size is 2384*1303*33mm and the weight is 37.5kg. It is supplied by JinkoSolar Co., Ltd.
2. 光伏阵列: 阵列A 平面尺寸 373,024x4,788mm, 采用2x28串双玻单面光伏, 含2个光伏组件; 阵列B 平面尺寸 18,502x4,788mm, 采用2x14串双玻单面光伏, 含1个光伏组件; 阵列对等组件间距要求为202mm
2. Photovoltaic Array: Array A has plane dimensions of 373,024mm x 4,788mm, arranged in a 2x28 double-row vertical layout, containing 2 photovoltaic strings; Array B has plane dimensions of 18,502mm x 4,788mm, arranged in a 2x14 double-row vertical layout, containing 1 photovoltaic string. The spacing between adjacent modules in the arrays is set at 202mm.
3. 光伏阵列均采用固定式安装, 阵列A采用朝北朝南, 角度为0度°; 阵列B采用朝东朝西, 南北向倾角为南北-倾角-1度, 角度是控制1°以内, 与正南夹角为固定倾角; 光伏阵列排布示意图
3. All photovoltaic arrays adopt a fixed installation method and are oriented to the north with an installation angle of 6°. The east-west tilt angle between north-south adjacent modules should be essentially consistent, with the angular difference controlled within 1°, and no significant staggering should occur. The arrays are arranged along the terrain in the east-west direction.
4. 本分阵为12个Z子分区的阵列编号为: 分阵号-Z子分区号-串接编号 表示。
4. The string number like "T04-INV01-S01" means: Z zone number-Inverter number-string number.
5. 本分阵共设逆变器12个, 逆变器编号与所在Z子分区-子分阵号对应。
5. There are 12 inverters in zone T04, and the inverter number corresponds to the partition number and sub-partition number.
6. 每一阵列接线需根据阵列与逆变器的位置合理选择连接方式, 并尽可能优化组件串并联电流量。
6. Array wiring should be reasonably selected according to the position of the array and the inverter, and the length of the series cable of the components should be optimized as much as possible.
7. 组件1x6线电缆头经端子接线盒连接光伏, 组件电缆跨东、下东线, 进逆变器或在墙面以上敷设时, 严禁PE管敷设, 敷设深度应符合现场实际情况, 并与业主沟通为准。
7. PV cable should be laid along the pulvin bracket on PV MMS. When the PV cable crosses

the purlin bracket or laid from the purlin bracket to the ground or connected from underground to the inverter or laid underground, it shall be laid through PE pipe. The final depth of the laying needs to be determined based on the actual on-site conditions and communication with the owner.

8、逆变器至箱变的3x150动力电缆需穿 ϕ 100PE 连接管(不截断)就近敷设到地下800mm 进行电缆直埋敷设;地下埋管距地面深度不宜小于0.5m,直埋电缆至地面不得小于0.8m。

8. The power cable with a cross-sectional area of 3x150 from the inverter to the box transformer shall be laid through Φ 100PE continuous pipes (not cut off) to the nearest 800mm underground for direct buried cable laying; The depth of PE pipe buried underground from the ground should not be less than 0.5m, and the directly buried cable to the ground should not be less than 0.8m.

9. 电缆过道路或水泵时, 穿热镀锌钢管。
9. When the cable passes through the road or canal, it shall wear hot dip galvanized steel pipe.

10、组件电缆数量与保护管截面的关系如下表

电缆根数	≤4根	≤8根	≤12根	≤20根
------	-----	-----	------	------

PE管管径	PE φ25	PE φ50	PE φ75	PE φ100
-------	--------	--------	--------	---------

10. The relationship between the quantity of PV cables and the section of the protection tube is as follows:

Quantity of cables	Less than 4	Less than 8	Less than 12	Less than 20
Size of tubes	PE ϕ 25	PE ϕ 50	PE ϕ 75	PE ϕ 100

设备材料表

序 号 No.	名 称 ITEM	型 式 及 规 格 TYPE AND CRITERION	单 位 UNIT	数 量 QUANTITY	备 注 REMARKS
1	组件串联线缆 PV string connection cable	H1222Z-K-1x6mm ²	米 m	35000	
2	二极直流电缆 Cable connecting inverters and the box transformer	Cu/XLPE/CTS/OSTA/PPVC-FR 3 x 150 mm ² Comp 1.8/3kV - Y	米 m	1300	
3	户外冷缩电缆终端 Outdoor cold shrink cable terminal head	Be applicable to Cu/XLPE/CTS/OSTA/PPVC-FR 3 x 150 mm ² Comp 1.8/3kV - Y	套 set	24	
4	通信信号电缆 Communication cabinet signal cable	Cu/AGT/XLPE/OSTA/PPVC (FR) 4 x 10 mm ² - Str - 0.6/1 kV - Y	米 m	10	
5	通信柜电源电缆 Communication cabinet power cable	Cu/XLPE/OSTA/PPVC-FR 2 x 4 mm ² - Str - 0.6/1kV - Y	米 m	10	
6	网络通信线 Network cable	STP-5e	米 m	10	
7	PE 管 PE pipe	φ25	米 m	130	
8	PE 管 PE pipe	φ50	米 m	120	
9	PE 管 PE pipe	φ75	米 m	130	
10	PE 管 PE pipe	φ100	米 m	30	
11	镀锌钢管 galvanized steel pipe	φ100	米 m	20	管底为防腐处理 (to go through galfers or road)

CLIENT APPROVAL	
A	☐ APPROVED
B	☐ APPROVED WITH NOTE
C	☐ COMMENTED
D	☐ NOT APPROVED
DATE:	SIGN:

[illegible]

PT. ARUNA HIJAU POWER

CONTRACTOR



--	--



DRAWING TITLE

T05 发电单元供电系统接线图
T05 PV System Wiring Diagram
DRAWING NO.
AHP-PL-EL-PDF-PSW-05

CODE STATUS : A. ISSUED FOR REVIEW, B. ISSUED FOR APPROVAL, C. APPROVED FOR CONSTRUCTION, D. AS BUILT, CLD. CANCELLED AND INFO = INFORMATION ONLY

SIZE	SHEET	SCALE	CLASS	STATUS	REV.
--	1 OF 1	1:100	-	A	00